

SmartStuff SmartBox

Item Number: SMBOXBT

Product Specifications



The TCP SmartBox is a Bluetooth Signal Mesh based lighting control device. Once connected to a luminaire, the Bluetooth Signal Mesh and SmartBox can be configured through the TCP SmartStuff App on any Android and iOS-based devices. Through the SmartStuff App, a luminaire can be directly controlled by the SmartBox or programmed to function automatically through a variety of control schemes.

Reasons to choose the TCP SmartBox Lighting Controls

- TCP Bluetooth Signal Mesh allows for over 100 TCP SmartStuff devices on one network.
- Used to control lighting luminaires with 0-10V dim to off drivers/ballast.
- Able to create scenes, schedules, and group TCP SmartStuff devices together.
- Pair with the TCP SmartStuff Remote for greater control and flexibility.
- Easy to install and setup through the TCP SmartStuff App.

Ideal Applications

- Linear High Bays
- Linear Low Bays
- Flat Panels
- Troffers
- General Purpose Strips
- Commercial Downlights

Specifications:

Input Voltage 120 - 277VAC @ 15mA
 Input Line Frequency..... 50/60Hz
 Maximum Power 1W
 Standby Power 500mW - 700mW
 Output Voltage..... 0-10VDC
 Operating Temperature.....-23°F to 113°F

Humidity <80% RH
 Network Protocol Bluetooth Signal Mesh
 Wireless Transmit & Receive Frequency.....2.4GHz
 Communication Range 150ft/46m
 Suitable for damp locations only





Regulatory Approvals

- ETL Listed
- Contains FCC ID: NIR-MESH8269
- Contains IC: 9486A-MESH8269
- Conforms to UL 8750
- Certified to CSA C22.2 No. 250.13



5 YEAR WARRANTY

Dimensions

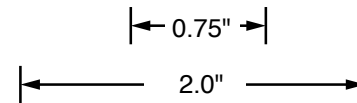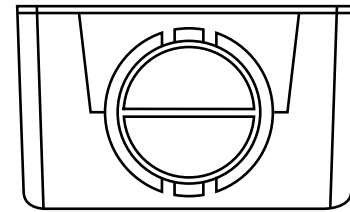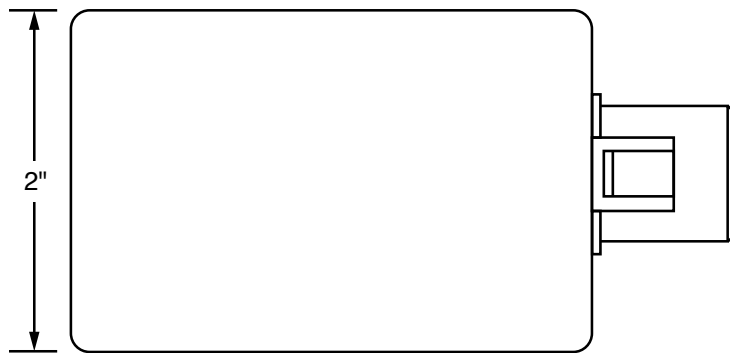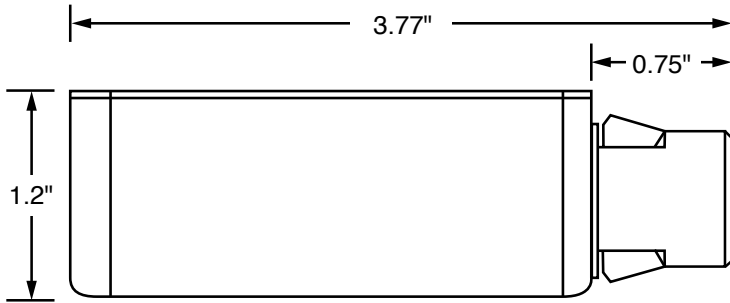

The TCP SmartStuff App is used to configure the Bluetooth Signal Mesh and TCP SmartStuff devices. Download the TCP SmartStuff App from the following options:


- Download the SmartStuff App from the Apple App Store or Google Play Store

- Use the QR Codes here:



Android iOS

Instructions for configuring TCP SmartStuff App and SmartStuff devices are at www.tcp.com/smartstuff/

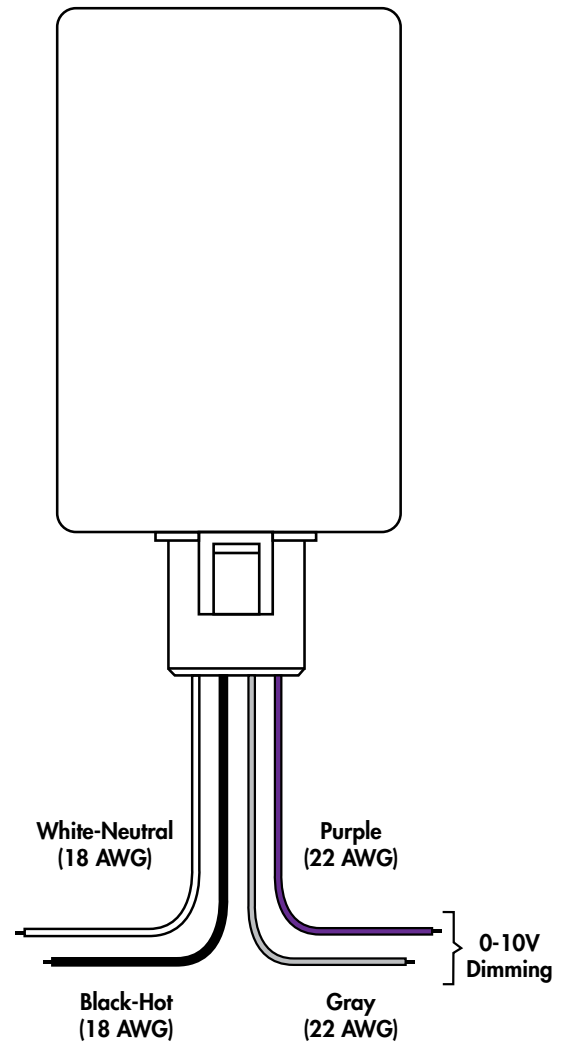

5 YEAR WARRANTY

Intertek