



LED High Lumen PAR Lamp

ENERGY SAVINGS • 25,000 HOURS • 5 YEAR WARRANTY

TCP's LED High Lumen PAR lamp combines traditional beauty with top-notch technology for wherever bright light is needed.

LIMITLESS OPTIONS FOR THE FOLLOWING APPLICATIONS

- Outdoor spaces
- Security
- Barns
- Garages

FEATURES

Up to 85% more efficient than incandescent/halogen replacements

Long life: 25,000 hours

Smooth dimming

Approved for wet location

Replaces 250w Par Halogen

Available in Flood, Narrow Flood, and Spot Beam Angles

BENEFITS

Instant energy savings

Minimizes replacement and maintenance costs

Creates just the right light

Can be used outdoors

SPECIFICATIONS

Color Temperatures	2700K; 3000K; 3500K; 4100K; 5000K
Input Line Voltage	120V
Input Line Frequency	50/60HZ
Lamp Life (Rated)	25,000 hours
Beam Angle	15° Spot; 25° Narrow Flood; 40° Flood
CRI	80

we know light.™



5 YEAR WARRANTY


RoHS COMPLIANT



LED High Lumen PAR Lamps

ENERGY SAVING • 25,000 HOURS • 5 YEAR WARRANTY

ITEM #	DESCRIPTION	VOLTAGE	LED WATTS	WATTAGE EQUIVALENT	LUMENS	LPW	CRI	COLOR TEMP	BEAM ANGLE	BASE
LED P38 30W										
15° Spot • 25,000 hours										
L30P38D2527KSP	LED 30W P38 DIM 27K SP	120V	30	250	2700	90	80	2700K	15°	E26
L30P38D2530KSP	LED 30W P38 DIM 30K SP	120V	30	250	3000	100	80	3000K	15°	E26
L30P38D2535KSP	LED 30W P38 DIM 35K SP	120V	30	250	3000	100	80	3500K	15°	E26
L30P38D2541KSP	LED 30W P38 DIM 41K SP	120V	30	250	3000	100	80	4100K	15°	E26
L30P38D2550KSP	LED 30W P38 DIM 50K SP	120V	30	250	3000	100	80	5000K	15°	E26
25° Narrow Flood • 25,000 hours										
L30P38D2527KNFL	LED 30W P38 DIM 27K FL	120V	30	250	2700	90	80	2700K	25°	E26
L30P38D2530KNFL	LED 30W P38 DIM 30K FL	120V	30	250	3000	100	80	3000K	25°	E26
L30P38D2535KNFL	LED 30W P38 DIM 35K FL	120V	30	250	3000	100	80	3500K	25°	E26
L30P38D2541KNFL	LED 30W P38 DIM 41K FL	120V	30	250	3000	100	80	4100K	25°	E26
L30P38D2550KNFL	LED 30W P38 DIM 50K FL	120V	30	250	3000	100	80	5000K	25°	E26
40° Flood • 25,000 hours										
L30P38D2527KFL	LED 30W P38 DIM 27K NFL	120V	30	250	2700	90	80	2700K	40°	E26
L30P38D2530KFL	LED 30W P38 DIM 30K NFL	120V	30	250	3000	100	80	3000K	40°	E26
L30P38D2535KFL	LED 30W P38 DIM 35K NFL	120V	30	250	3000	100	80	3500K	40°	E26
L30P38D2541KFL	LED 30W P38 DIM 41K NFL	120V	30	250	3000	100	80	4100K	40°	E26
L30P38D2550KFL	LED 30W P38 DIM 50K NFL	120V	30	250	3000	100	80	5000K	40°	E26

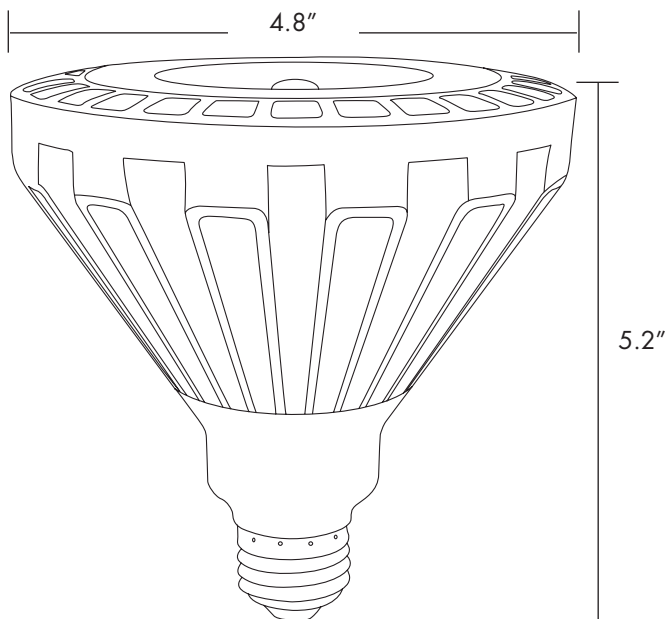

For the most up-to-date specs, please visit www.tcpi.com