


Features & Benefits

- Ultra bright, energy efficient, long life Red or Green LEDs
- Dual 120/277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 4.8V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects to internal battery to LED board for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours
- Aluminum mounting canopy included for top or end mount
- Universal knockout pattern on back plate for wall mount
- Premium-grade, die-cast aluminum housing
- Field selectable knockout Chevron directional indicators
- Unique design allows double face conversion in the field
- Quick-snap face plate closure
- Five year warranty on all electronics and housing. Battery prorated for five years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL Listed for damp locations (0°-50°)
- Certified to CEC under Title 20 Regulations



Dimensions:

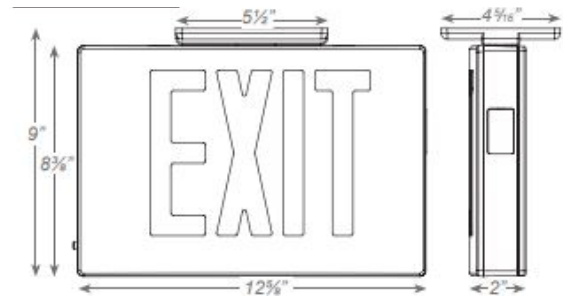

Ordering Information

Item #	DESCRIPTION
26D93	LED DIECAST EXIT SIGN - ALUMINUM WITH RED LETTERING

Specifications and dimensions subject to change without notice.

TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 20 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market - that transforms your surroundings and envelopes you in warmth - lighting that generates beauty with every flip of the switch.

Sales:

Date:

Model:

Project:

Rep:

Catalog Number:

Type:

Notes:



For more information on the quality and care TCP can deliver, call us at **800.324.1496** or visit tcp.com

325 Campus Dr. | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516