



LED Selectable Commercial Recessed Downlights

(High Output Lens)

Wattage Selectable Product Specifications



TCP's High Output Selectable Commercial Recessed Downlights offer choices for wattages, making these adaptable for many situations.

Reasons to choose LED Selectable Commercial Recessed Downlights from TCP

- 3 Selectable Wattages
- Lens Version provides 10% more delivered lumens
- 50,000 hours rated life minimizes replacement and maintenance costs
- Flicker Free Design for consistent lighting
- Shatter resistant lens
- Matte Silver Finish
- Easy installation and integrated trim
- Snap clips allow for installation without a recessed can
- 70° beam angle
- Smooth, uniform dimming from 100 - 5%

Ideal Applications

- Commercial
- Retail
- Industrial
- Healthcare

Specifications:


Color Temperatures 4100K, 5000K
 Wattage Options 30/40/50W
 Input Line Voltage 120-347V
 Input Line Frequency 50/60HZ
 Dimming 0-10V
 Lamp Life (rated) 50,000 hours

Minimum Starting Temp -22F/-30C
 Maximum Operating Temp 104°F/40°C
 CRI 80
 IC-rated for direct contact with insulation
 UL approved for damp locations

Specifications:




Wattage Selectable Driver



High Output Lens

ITEM #	DESCRIPTION	VOLTAGE	LED WATTS	REPLACEMENT WATTS	CCT	LUMENS	LPW	CRI	MOL (inches)	DIA (inches)
DLC10SWHZDL41K	LED High Output 10" Comm Downlight 41K	120-347	30/40/50	100	4100K	6350	197/148/118	80	8.25	10.9
DLC10SWHZDL50K	LED High Output 10" Comm Downlight 50K	120-347	30/40/50	100	5000K	6400	197/148/118	80	8.25	10.9
DLC12SWHZDL41K	LED High Output 12" Comm Downlight 41K	120-347	30/40/50	125	4100K	6225	197/148/118	80	9.5	13
DLC12SWHZDL50K	LED High Output 12" Comm Downlight 50K	120-347	30/40/50	125	5000K	6300	197/148/118	80	9.5	13

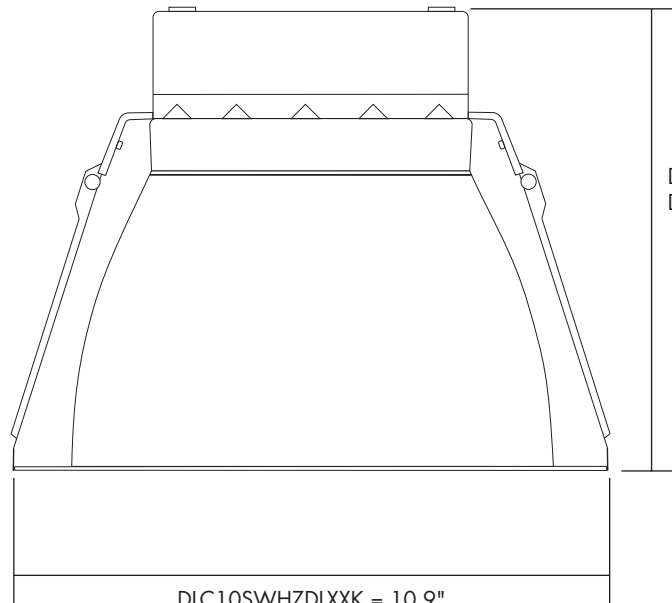

DLC10SWHZDLXXX = 8.25"
DLC12SWHZDLXXX = 9.5"