




QTL Series IP65 Rated High Bay

Product Specifications

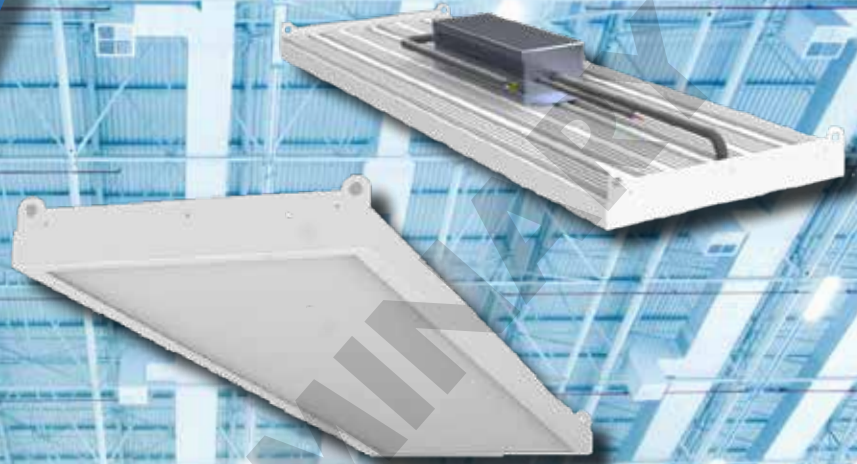

The QTL Series IP65 Rated High Bay features a lightweight extruded aluminum body, 2FT or 4FT length options and up to 60,000 lumens, resulting in a versatile solution for endless applications. The included mounting hardware makes the QTL Series IP65 Rated High Bay quick to install and will provide a long-lasting, durable light source for years to come. This waterproof, 70°C (158°F) temperature rated high bay is the perfect light for intense applications.

Reasons to choose the QTL Series IP65 Rated High Bay from TCP

- Lightweight, quick install construction
- High temperature rating 70°C (158°F)
- Standard frosted lens for glare control
- No shadows for smooth, even lighting
- IP65 rated
- 0-10V smooth dimming
- 250W or 400W HID equivalent
- 50,000 hour rated life
- Wide 120 degree beam spread
- Optional controls available
- Includes 6-foot power cord

Ideal Applications

- High ceiling locations
- Commercial settings
- Industrial settings
- Water sports arenas
- Warehouses
- Other wet applications



Applications

The QTL Series IP65 Rated High Bay is a versatile solution for endless wet location applications. It's ideal for high ceiling, commercial, and industrial settings. With its lightweight extruded aluminum body and included mounting hardware, the QTL Series IP65 Rated High Bay by TCP is quick to install and will provide a long-lasting, durable light source for years to come.

Features

- Lightweight, quick install construction
- Standard frosted lens for glare control
- No shadows for smooth, even lighting
- IP65 wet location rated
- NSF Rated
- 0-10V smooth, no-flicker dimming
- Operating temperature: -4°F to 158°F
- 250W or 400W HID equivalent
- Long 50,000 hour rated life
- Wide beam spread due to LED design providing a clean cutoff
- Optional battery backup or motion sensors available
- Includes 6-foot power cord

Hardware Included

- 2 tong hangers
- 5' jack chains
- 6' pre-wired cord

Installation

Before hanging installation, please consult your local ordinances and building codes.



Listings

cULus Listed
RoHS Compliant
DLC 5.1 Standard
NSF Rated

Warranty

Five year limited warranty against defects in manufacturing.

Catalog Ordering Matrix Example: QHB2UZDA250K

QHB	2	U	ZD	A2	50K		
FAMILY	LENGTH	VOLTAGE ¹	CONTROLS	LUMEN PACKAGE (Power) ²	COLOR TEMPERATURE	FACTORY INSTALLED OPTIONS	WET LOCATION RATING
QHB - QTL Series High Bay	2 - 2 foot	U - 120-277V H - 347-480V C - 120-347V	ZD - 0-10V Dimming	A2 - 14,850L (110W) E4 - 17,550L (130W) A3 - 22,275L (165W) A4 - 30,500L (220W)	40K - 40K CCT 50K - 50K CCT	Blank - No control MS - IP65 Microwave Motion/ Daylight Harvest Sensor	IP - IP65 Wet Location

¹ Approximate lumen output. Actual performance may vary based on CCT, options selected and end use application.

² Actual wattage may differ by +/- 10%

³ C - 120-347V is for Canada only

Field Installed Accessories

- QHB2WGUARD1 - Wire Guard for 110W Model
- QHB2WGUARD2 - Wire Guard for 130W-220W Models
- BILDAIP65EM30 - 30W IP65 Wet Location remote mount battery backup

Applications

The QTL Series IP65 Rated High Bay is a versatile solution for endless wet location applications. It's ideal for high ceiling, commercial, and industrial settings. With its lightweight extruded aluminum body and included mounting hardware, the QTL Series IP65 Rated High Bay by TCP is quick to install and will provide a long-lasting, durable light source for years to come.

Features

- Lightweight, quick install construction
- Standard frosted lens for glare control
- No shadows for smooth, even lighting
- IP65 wet location rated
- NSF Rated
- 0-10V smooth, no-flicker dimming
- Operating temperature: -4°F to 158°F
- 250W or 400W HID equivalent
- Long 50,000 hour rated life
- Wide beam spread due to LED design providing a clean cutoff
- Optional battery backup or motion sensors available
- Includes 6-Foot power cord

Hardware Included

- 2 tong hangers
- 5' jack chains
- 6' pre-wired cord

Installation

Before hanging installation, please consult your local ordinances and building codes.

Catalog Ordering Matrix

Example: QHB4UZDA450K

QHB	4	U	ZD	A4	50K		
FAMILY	LENGTH	VOLTAGE 3	CONTROLS	LUMEN PACKAGE (Power) ^{1,2}	COLOR TEMPERATURE	FACTORY INSTALLED OPTIONS	WET LOCATION RATING
QHB - QTL Series High Bay	4 - 4 foot	U - 120-277V H - 347-480V C - 120-347V	ZD - 0-10V Dimming	A4 - 30,500L (220W) A6 - 44,550L (330W) A8 - 59,400L (440W)	40K - 40K CCT 50K - 50K CCT	Blank - No control MS - IP65 Microwave Motion/ Daylight Harvest Sensor	IP - IP65 Wet Location


¹ Approximate lumen output. Actual performance may vary based on CCT, options selected and end use application.

² Actual wattage may differ by +/- 10%

³ C - 120-347V is for Canada only

Field Installed Accessories

- QHB4WGUARD1 - Wire Guard for 220W Model
- QHB4WGUARD2 - Wire Guard for 330W-440W Models
- BILDAIP65EM30 - 30W IP65 Wet Location remote mount battery backup



Listings


cULus Listed
RoHS Compliant
DLC 5.1 Standard
NSF Rated

Warranty


Five year limited warranty against defects in manufacturing.

Wireline Dimensions


2' model




QHB2UZDA2**KIP & QHB2UZDE4**KIP




QHB2UZDA3**KIP & QHB2UZDA4**KIP




4' model



QHB4UZDA4**KIP



QHB4UZDA6**KIP & QHB4UZDA8**KIP

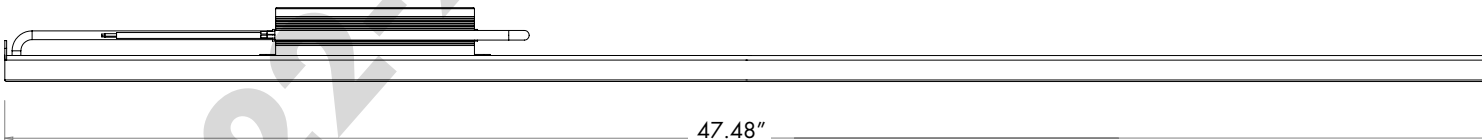

TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 20 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market - that transforms your surroundings and envelopes you in warmth - lighting that generates beauty with every flip of the switch.

Sales:

Date:

Model:

Project:

Rep:

Catalog Number:

Type:

Notes:



For more information on the quality and care TCP can deliver, call us at **800.324.1496** or visit tcp.com

325 Campus Dr. | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516