



LED Smooth Face Snap-In Downlights

Product Specifications



TCP's LED Smooth Face Snap-In Downlights are the perfect choice for remodeling or new construction projects. The slim, energy-efficient design is easy to install and offers a rated lifetime of 50,000 hours.

Reasons to choose the LED Smooth Face Snap-In Downlights from TCP

- 4" and 6" diameter sizes
- Direct wire - no recessed can required
- Integrated junction box
- Easy installation
- Dimmable
- Slim, low-profile design
- Excellent color consistency
- Back-lit technology
- Available in 3000K and 5000K
- 50,000 hour rated life
- UL approved for wet locations
- IC rated
- Energy Star® Certified

Ideal Applications

- Retrofits
- New construction
- Residential
- Office
- Retail
- Hospitality
- Drop ceilings
- Remodeling



Applications

Slim, low-profile design and easy snap-in installation makes these downlights ideal for 4" and 6" new construction applications.

Construction


- Integrated J-box for direct wire application
- Spring-loaded tabs for easy installation

Electrical

- UL approved for wet locations
- Easily access wiring for quick installation
- 50,000 hours rated life

Optics

- Excellent color consistency
- Smooth, uniform dimming
- Highly-efficient LEDs and driver
- Triac dimming

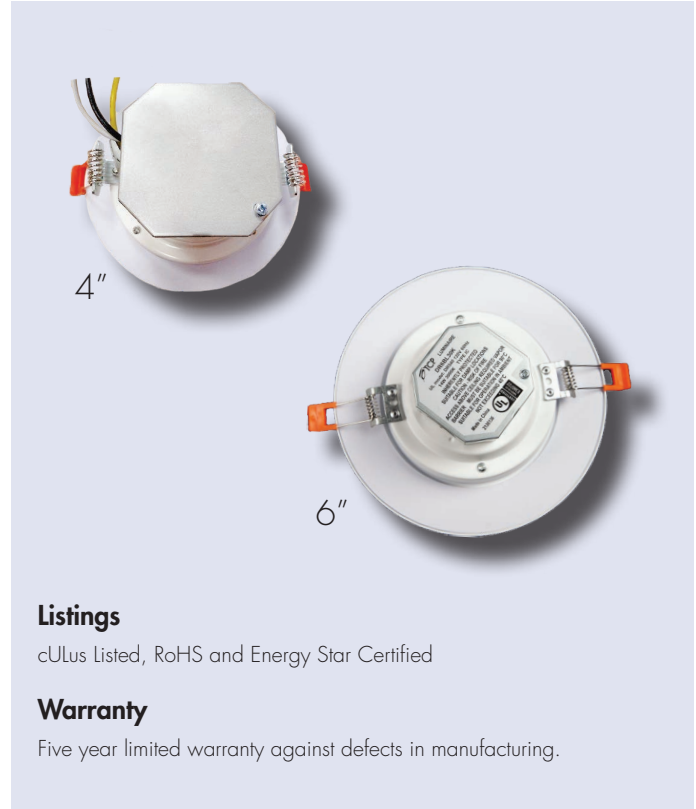

Listings

cULus Listed, RoHS and Energy Star Certified

Warranty

Five year limited warranty against defects in manufacturing.

Accessories

Adjustable Frame Kit is also available:

- Adjusts to fit both 4" and 6" downlights for use in T-Grid ceilings.

46INFRAMEKIT 4"/6" Adjustable Frame Kit



LED Smooth Face Snap-In Downlights

| ITEM # | DESCRIPTION | VOLTAGE | INCAND. WATTS | WATTAGE | LUMENS | LPW | COLOR TEMP | CRI | BEAM ANGLE | MOL (IN) | DIA. (IN) |
|------------|----------------------------|---------|---------------|---------|--------|------|------------|-----|------------|----------|-----------|
| DR4BLSF30K | 4" SMOOTH FACE SNAP-IN 30K | 120 | 75 | 10 | 850 | 85 | 30K | 80 | 90° | 3 | 5 |
| DR4BLSF50K | 4" SMOOTH FACE SNAP-IN 50K | 120 | 75 | 10 | 850 | 85 | 50K | 80 | 90° | 3 | 5 |
| DR6BLSF30K | 6" SMOOTH FACE SNAP-IN 30K | 120 | 85 | 14 | 1100 | 78.6 | 30K | 80 | 100° | 3 | 7.125 |
| DR6BLSF50K | 6" SMOOTH FACE SNAP-IN 50K | 120 | 85 | 14 | 1100 | 78.6 | 50K | 80 | 100° | 3 | 7.125 |

TCP Standard LED Lamps, LED Filament Lamps and TCP Downlights have been tested to work with the following dimmers:

| BRAND | MODEL |
|---------|------------------|
| LUTRON | AYCL-153P |
| | CTCL-153PD-H |
| | CTCL-53PD-H |
| | DV-600P |
| | DV-600PR-WH |
| | DV-603PH-WH |
| | DVCL-153P |
| | LGCL-153P |
| | MACL_153M |
| | MSCL-OP153M |
| | PD-6WCL |
| | SCL-153PR |
| | SELV-300P |
| | TGCL-153P |
| | MRF2S-6ELV120-WH |
| LEVITON | 6811 |
| | 6602 |
| | 6631 |
| | 6672 |
| | 6672-L |
| | 6674 |
| | DSL06 |
| | IPL06 |
| COOPER | DAL06P |
| | SAL06P |

*Dimming compatibility tests are performed under a controlled lab environment. Field conditions may vary from this type of environment. Dimmers may differ by age and versions under the same item number which may affect compatibility. Compatibility may also extend beyond this list as TCP products should work with most C-L Type Triac Dimmers. TCP recommends trying a few dimmer-lamp combinations in an on-site test to ensure compatibility and performance before a major installation. If there's a dimmer not on this list we can perform a lab test for compatibility.

TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 20 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market - that transforms your surroundings and envelopes you in warmth - lighting that generates beauty with every flip of the switch.

Sales:

Date:

Model:

Project:

Rep:

Catalog Number:

Type:

Notes:



For more information on the quality and care TCP can deliver, call us at **800.324.1496** or visit tcp.com

325 Campus Dr. | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516